


# DSC T-LINK™ RESIDENTIAL IP ALARM COMMUNICATOR

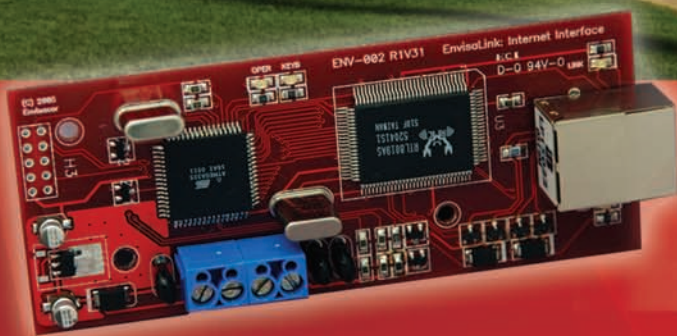

## Low-cost IP Alarm Communicator Provides Reliable Protection for Homes

### TL150

A valuable addition to the award-winning T-Link family of Internet/network alarm communicators, the value-priced TL150 residential IP alarm communicator creates fully supervised security solutions between the household and the central monitoring station. The TL150 is effective in a backup or primary alarm communications role and provides homeowners with the ability to arm/disarm their security system and view the status of individual zones through a webpage on their home computer.

- ▶ Supports all PowerSeries control panels
- ▶ Compact, easy-installation design
- ▶ Homeowners can arm/disarm security system and view zone status through a webpage on their home computer
- ▶ Instant, always-on IP communication
- ▶ Works over local LAN/WAN network or the Internet
- ▶ 128-bit AES encryption
- ▶ Supports DHCP (dynamic IP addresses)
- ▶ Low network bandwidth usage
- ▶ Compatible with 10/100BaseT networks
- ▶ Supervised as a KEYBUS module (supervision of both KEYBUS and network connections)
- ▶ T-Link programming (IP address and account number) through a web-browser interface

**DSC**®

# DSC T-LINK™ RESIDENTIAL IP ALARM COMMUNICATOR

## Homeowners Can Manage Their Security System Through Their Personal Computer

From their personal computer, homeowners are able to arm/disarm their security system and view the status of individual zones through a zone status grid on a webpage. The grid provides additional information that is not available from any DSC keypad. At a glance, homeowners can see how recently a zone was triggered.

## Saves Money


The simple-to-install TL150 works on existing home networks to provide secure Internet communications, thereby eliminating the need for a dedicated phone line. In addition, there are no long-distance or toll charges when routing alarm communications via the Internet.

## Instant, Always-on IP Communication

Harnessing the speed of the Internet allows signals to be sent almost immediately, whereas phone communication can take 20-30 seconds. As well, the network communication link can be monitored for failure by both the panel and central station receiver.

### Ordering Information:

T-Link TL150 . . . . . Residential IP Alarm Communicator
--

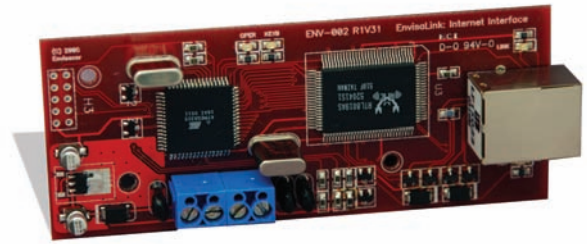

## Secure Communication

The TL150 utilizes industry-leading 128-bit AES encryption to help eliminate security risks. The TL150 communication stream is small and requires only a limited amount of network bandwidth. This ensures that the integrity of the data being transferred never becomes compromised.

## Compatibility

The TL150 is compatible with all PowerSeries control panels:

Power432™ PC580/585

Power632™ PC1555MX/1565

Power832® PC5010

Power864™ PC5020

PC1616 6-16 zone

PC1832 8-32 zone

PC1864 8-64 zone

Central station receiver:

Sur-Gard System III with SG-DRL3-IP line card

## Specifications

Dimensions . . . . . 4 1/5" x 1 7/10"  
(107 mm x 43 mm)  
Input Voltage . . . . . 12 Vdc (from KEYBUS)  
Current Draw . . . . . 65 mA  
Operating Environment . . . . . 32° to 122° F (0° to 50° C)  
Relative Humidity . . . . . 5% to 93%

Distributed by:

**DSC**

For product information  
[www.dsc.com](http://www.dsc.com)

Product specifications and availability subject to change without notice. Certain product names mentioned herein may be trade names and/or registered trademarks of other companies.  
©2006 2006-01

**tyco** / Fire & Security